



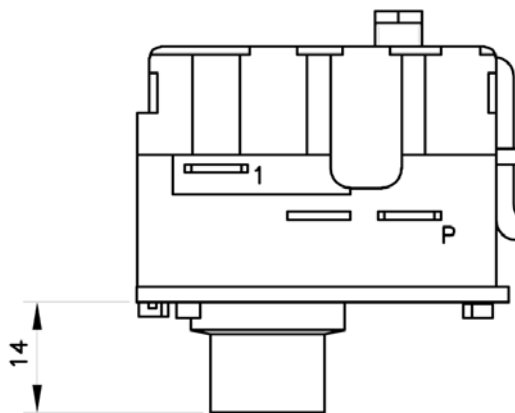
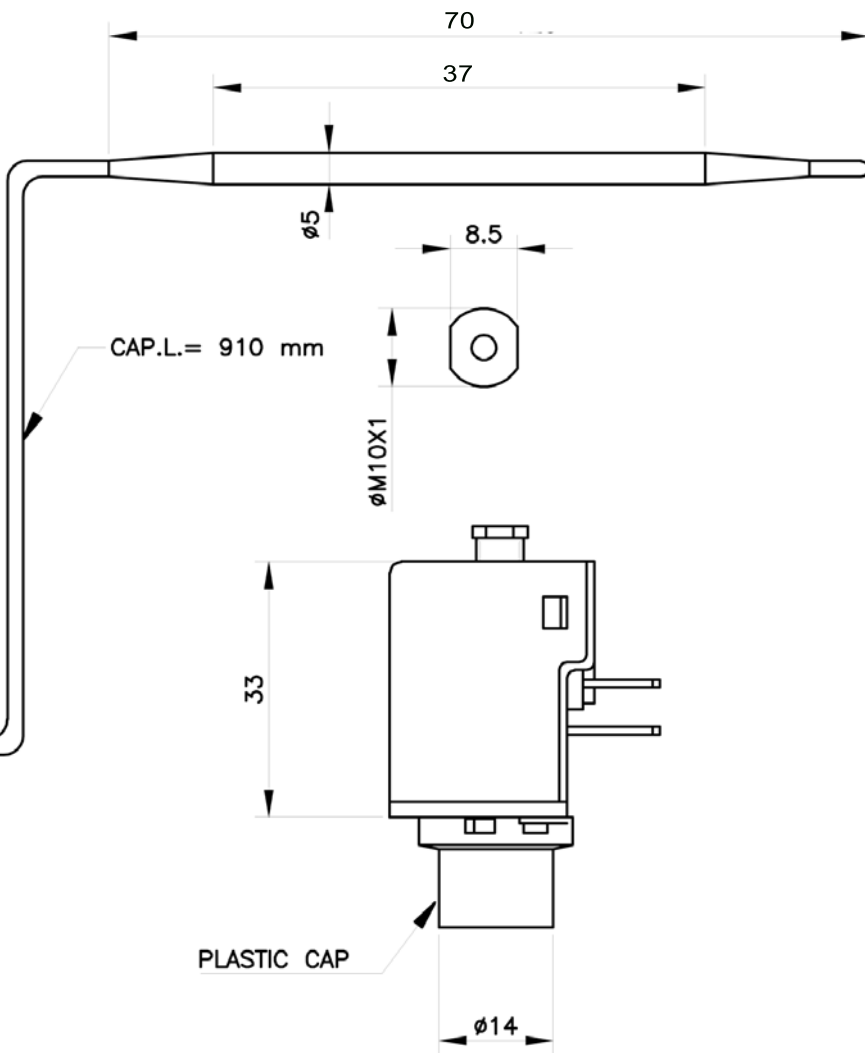
SCHEMA ELETTRICO
ELECTRICAL DIAGRAM :

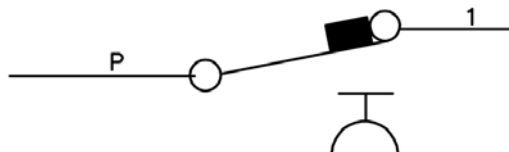

ELETTRIC RATING :
P 1 16A 250 V

APPROVALS 

CONNECTION TABS 1/4"
MIN CAPILLARY BENDING RADIUS 5mm
STAINLESS STEEL CAPILLARY AND BULB
SETTING TEMPERATURE : 235°C±9°C
DELIVER WITH SEPARATED CAP AND NUT
INSULATION 



THERMOSTAT TS RM ST T.F. 235°C COMTHERM

C.a.e.m. s.r.l.

Via Rivera 106-108

10040 ALMESE (TO) ITALY



SCALA :

DATA : 01-04-2009

DIS. TACCA GIANLUCA

VISTO

SOSTITUISCE IL:

DIS. N°

MATERIALE

FINITURA

LP4503